

Underwater Intelligence Sensor Protection System

Peter J. Stein, Armen Bahlavouni

Scientific Solutions, Inc.

18 Clinton Drive

Hollis, NH 03049-6576

Phone: (603) 880-3784, Fax: (603) 598-1803, email: pstein@mv.mv.com

Contract Number: N00014-98-C-0003

LONG-TERM GOAL

The long-term goal is to develop an Underwater Intelligent Sensor Protection System (UISPS) to keep underwater radiometers free of algae growth and other contaminants. UISPS will allow long-term autonomous radiometric measurements (in the order of one year), which are not currently possible.

OBJECTIVES

The objectives of this program were the design and assembly of the prototype, perform preliminary testing in laboratory, debug the system as necessary, and perform testing in an ocean environment.

APPROACH

This device consists of a spherical housing of which the lower portion houses the radiometer. The upper portion consists of an optical glass that completes the sphere. The composite sphere rotates within a circular aperture/scrapper which is in the immediate vicinity, but does not touch the sphere. The sphere and the scrapper are attached to a cylindrical shell. As the sphere rotates past the scrapper, the bulk of the contaminants are removed. Continuing the rotation, brings the optical window (and the rest of the sphere) into a cleaning solution and past a set of brushes and squeegees within the cylindrical shell. The cleaning cycle is complete when the sphere completes one full revolution and the optical glass reaches the 12 o'clock position again.

The frequency of cleaning, number of rotations per cleaning cycle, data sampling rate and frequency, and all other data acquisition and control parameters will be adjustable for greater flexibility of the device. A bi-axial inclinometer has also been implemented within the sphere to provide reference tilt data.

During long term testing, an unprotected radiometer adjacent to UISPS will be used to verify the contamination extent as well as data.

WORK COMPLETED

A complete set of design drawings, machined components, and all other necessary mechanical hardware to assemble one prototype unit exist. The main computer for data acquisition and control has been purchased. An interface printed circuit board has also been designed and manufactured by SSI. All electronic components necessary to populate this circuit board are also in house. A modified version of

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 1998		2. REPORT TYPE		3. DATES COVERED 00-00-1998 to 00-00-1998	
4. TITLE AND SUBTITLE Underwater Intelligence Sensor Protection System				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Scientific Solutions Inc,18 Clinton Drive,Hollis,NH,03049				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002252.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Satlantic OCI-200 seven wavelength radiometer housing was designed by SSI and built by Satlantic. An assembly drawing and some photographs are presented in the results section.

RESULTS

The assembly drawing and photographs of the hardware are shown below.

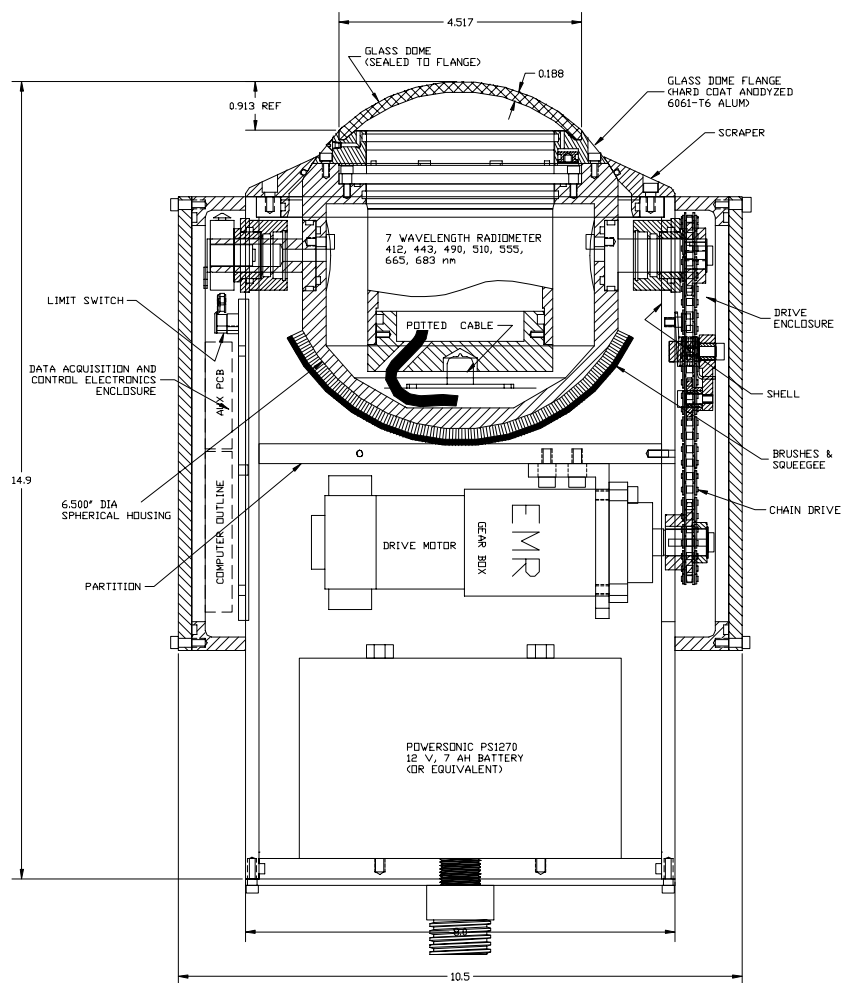


Figure 1. UISPS Assembly Drawing
(Patent Number: 5,591,907 dated 1/7/97)



Figure 2. Drive Enclosure

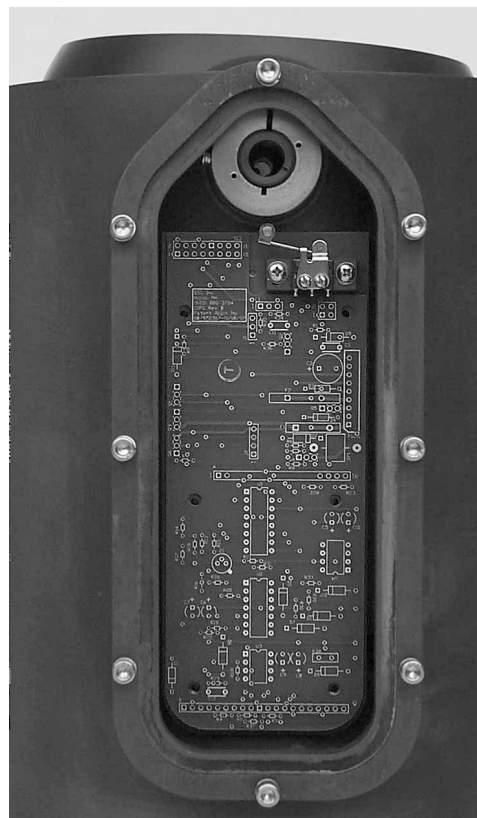


Figure 3. Electronics Enclosure

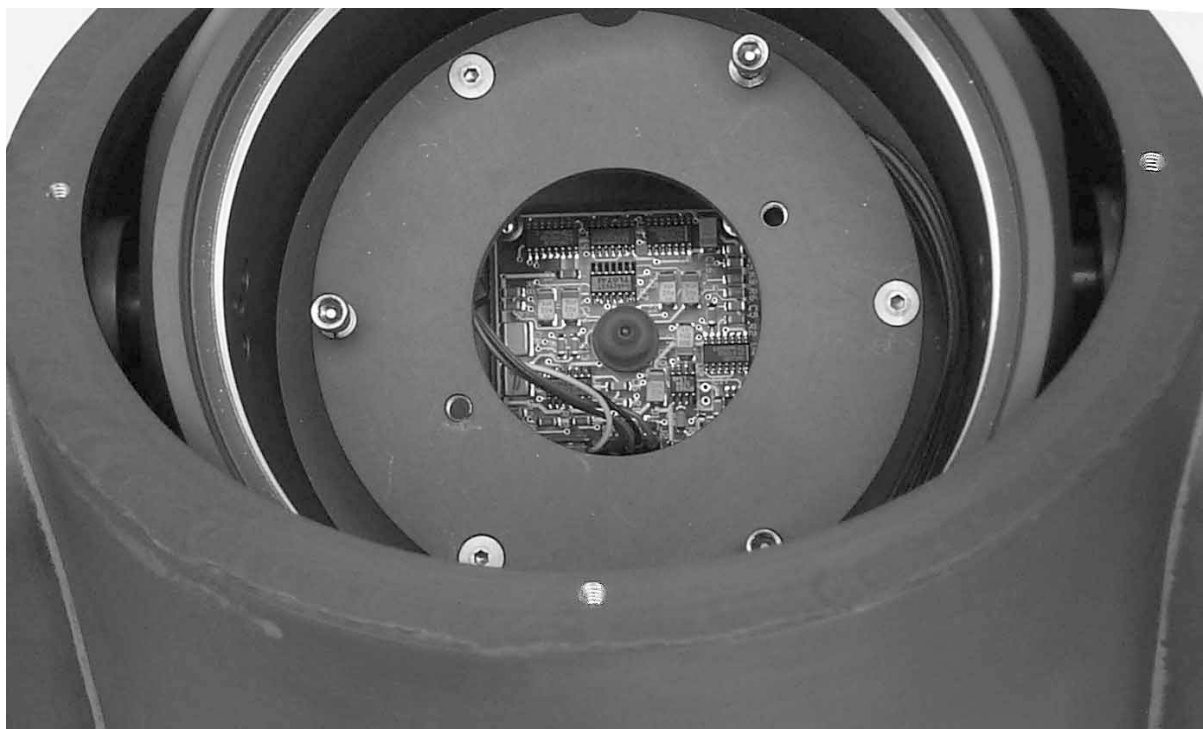


Figure 4. Bi-axial Inclinator



Figure 5. Scraper Ring



Figure 6. Optical Window

IMPACT/APPLICATIONS

This system will considerably enhance the quality of the underwater radiation measurements and reduce hardware maintenance costs by keeping the sensor clean and free of biological growth. Furthermore, the longevity of measurements will be greatly improved in comparison to current deployments.

TRANSITIONS

A proposal has been submitted to ONR for completion of the Underwater ISPS and long term field testing of the system.

RELATED PROJECTS

During the deployment phase of the SHEBA program in September 1997, SSI personnel deployed eight of the Arctic ISPS units in satellite sites as far as 50 Km from the main ice camp [1]. These units worked flawlessly for one full year, as intended. In October 1998, they were recovered, and one site re-deployed. Further information and deployment photographs are available on SSI's web page [1].

A marine version of the ISPS has also been development under ONR Contract #: N00014-95-C-0406. This version is intended to be integrated into the Navy's next generation meteorological sensor package.

REFERENCES

1. <http://www.ssilink.com>